


MAKE  
DELIVERY  
SAFER



NINGBO INHIGH NEW MATERIAL TECHNOLOGY CO.,LTD.

---

Add: No.286 Qinghe Road,Yinzhou District,Ningbo,Zhejiang,China. 315000  
Mobile:+86 189 6824 9988 Email:sales@ton-lifting.com

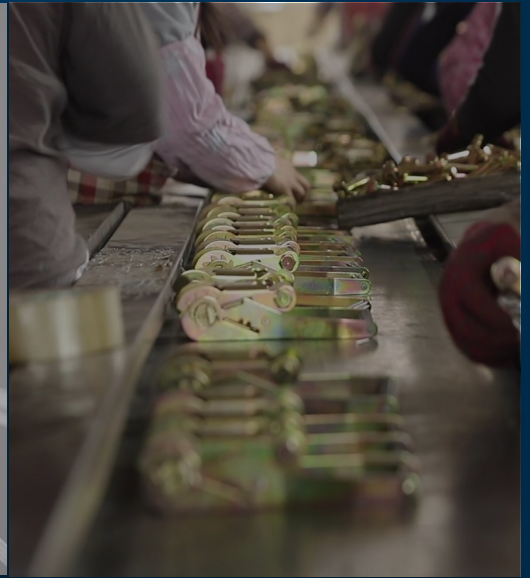

**TON LIFTING**  
**MAKE DELIVERY SAFER**

**CERTIFICATE**

Holder of Certificate: **NINGBO JANGBEI TON LIFTING INDUSTRY TRADE CO., LTD.**  
 No. 101 Huangyan Road, 315000 Ningbo, PEOPLE'S REPUBLIC OF CHINA

Certification Mark:

Product: **Lashing Belts**

Tested according to: **EN 12002:2005**  
 EN 12013:2014

The product meets the safety and health requirements of the German Product Safety Act (Section 2(1) of the ProdSG). The certificate holder shall ensure that the Product is not placed on the market or put into service in any way, if, in addition to the certificate holder's product liability, it is not possible to identify the Product. The certificate is valid only for the Product and the certified holder. See also the label content!

Test report no.: **7640100001-00**  
 Valid until: **2024-01-22**

Date: **2019-03-25**

Page 1 of 1

TUV SÜD Product Service GmbH | Certification Body | Hebelstraße 61 | 85386 München | Germany

**CERTIFICATE**

Holder of Certificate: **NINGBO JANGBEI TON LIFTING INDUSTRY TRADE CO., LTD.**  
 No. 101 Huangyan Road, 315000 Ningbo, PEOPLE'S REPUBLIC OF CHINA

Certification Mark:

Product: **Flat lifting sling Flat woven webbing sling**

Tested according to: **EN 12002:2005**  
 EN 12013:2014

The product meets the safety and health requirements of the German Product Safety Act (Section 2(1) of the ProdSG). The certificate holder shall ensure that the Product is not placed on the market or put into service in any way, if, in addition to the certificate holder's product liability, it is not possible to identify the Product. The certificate is valid only for the Product and the certified holder. See also the label content!

Test report no.: **7640100001-00**  
 Valid until: **2024-01-17**

Date: **2019-03-18**

Page 1 of 1

TUV SÜD Product Service GmbH | Certification Body | Hebelstraße 61 | 85386 München | Germany

**CERTIFICATE**

Holder of Certificate: **NINGBO JANGBEI TON LIFTING INDUSTRY TRADE CO., LTD.**  
 No. 101 Huangyan Road, 315000 Ningbo, PEOPLE'S REPUBLIC OF CHINA

Certification Mark:

Product: **Round sling**

Tested according to: **EN 12002:2005**  
 EN 12013:2014

The product meets the safety and health requirements of the German Product Safety Act (Section 2(1) of the ProdSG). The certificate holder shall ensure that the Product is not placed on the market or put into service in any way, if, in addition to the certificate holder's product liability, it is not possible to identify the Product. The certificate is valid only for the Product and the certified holder. See also the label content!

Test report no.: **7640100001-00**  
 Valid until: **2024-01-14**

Date: **2019-03-18**

Page 1 of 1

TUV SÜD Product Service GmbH | Certification Body | Hebelstraße 61 | 85386 München | Germany

**CERTIFICATE**

Holder of Certificate: **NINGBO JANGBEI TON LIFTING INDUSTRY TRADE CO., LTD.**  
 No. 101 Huangyan Road, 315000 Ningbo, PEOPLE'S REPUBLIC OF CHINA

Production Facility(s): **000000**

Certification Mark:

Product: **Flat lifting sling Disposable lifting belt**

Model(s): **DL3000, DL3700, DL31000, DL31000, DL33000**

Parameters:

Model	DL3000	DL3700	DL31000
Working load limit (kN)	22,5	22,5	22,5
Working load limit (t)	2,25	2,25	2,25
Material	100% Polyester	100% Polyester	100% Polyester
Material width (mm)	100	100	100
Material length (mm)	2000	2000	2000
Material weight (kg)	0,8	0,8	0,8
Material weight (t)	0,0008	0,0008	0,0008

Tested according to: **EN 12002:2005**

The product meets the safety and health requirements of the German Product Safety Act (Section 2(1) of the ProdSG). The certificate holder shall ensure that the Product is not placed on the market or put into service in any way, if, in addition to the certificate holder's product liability, it is not possible to identify the Product. The certificate is valid only for the Product and the certified holder. See also the label content!

Test report no.: **7640100001-00**  
 Valid until: **2024-01-11**

Date: **2019-03-17**

Page 1 of 1

TUV SÜD Product Service GmbH | Certification Body | Hebelstraße 61 | 85386 München | Germany



Dear customer.

The cargo securing products division of Ton Lifting Industrial Co.,Ltd was founded in 2011, located at Ningbo to service the trucking industry with a variety of cargo control products worldwide.

At Ton Lifting Industrial we own over 10000 square meter working room, 50 workers, enough equipments to keep delivery times down, and we employ highly skilled specialists in our team of 15 permanent employees in order to keep high quality cargo securing products to meet customers' requirements.

Our wide assortment of products include tie down straps, flat sling, round sling, winch, tow straps, bungee straps, cargo net, plastic chain, slack lines and many many others.

Ton Lifting is the leading provider of lashing and lifting products and solutions in China.



**MAKE  
DELIVERY  
SAFER**



---

### **Body Material Option:**

Inox 304 / 316 . Steel . Aluminum

### **Handle of Ratchet Buckle Option:**

Steel . Aluminum . Plastic . Rubber

### **Surface Treatment:**

Yellow/White/Black zinc galvanized in Chrome 3+ / 6+ . Painting .



## Lashing Systems with Ratchet Buckle EN12195-2

CODE	Width(mm)	LC(daN)	System BS	STF(daN)	
TL10010	100	5000	10000	500	2-parts Double J hook+Ratchet
TL10008	100	4000	8000	500	2-parts Double J hook+Ratchet
TL75010	75	5000	10000	500	2-parts Double J hook+Ratchet
TL75008	75	4000	8000	500	2-parts Double J hook+Ratchet



CODE	Width(mm)	LC(daN)	System BS	STF(daN)	
TLE5005	50	2500	5000	500	2-parts Double J hook+Ergo buckle
TLE5005	50	2500	5000	500	2-parts Double J Hook with Safety Latch+Ergo buckle
TLE5005	50	2500	5000	500	2-parts Single J Hook+Ergo buckle
TLE5005	50	2500	5000	500	2-parts Claw Hook+Ergo buckle



CODE	Width(mm)	LC(daN)	System BS	STF(daN)	
TL5005	50	2500	5000	300	2-parts Double J hook+Ratchet
TL5005	50	2500	5000	300	2-parts Double J Hook With Safety Latch+Ratchet
TL5005	50	2500	5000	300	2-parts Single J Hook+Ratchet
TL5005	50	2500	5000	300	2-parts Claw Hook+Ratchet



CODE	Width(mm)	LC(daN)	System BS	STF(daN)	
TL5004	50	2000	4000	300	2-parts Double J hook+Ratchet
TL5004	50	2000	4000	300	2-parts Double J Hook With Safety Latch+Ratchet
TL5004	50	2000	4000	300	2-parts Single J Hook+Ratchet
TL5004	50	2000	4000	300	2-parts Claw Hook+Ratchet



More Hook Option at Page 10-12

## Lashing Systems with Ratchet Buckle EN12195-2

CODE	Width(mm)	LC(daN)	System BS	STF(daN)	
TL5003	50	1500	3000	300	2-parts Double J hook+Ratchet
TL5003	50	1500	3000	300	2-parts Double J Hook With Safety Latch+Ratchet
TL5003	50	1500	3000	300	2-parts Single J Hook+Ratchet
TL5003	50	1500	3000	300	2-parts Claw Hook+Ratchet



CODE	Width(mm)	LC(daN)	System BS	STF(daN)	
TL5002	50	1000	2000	210	2-parts Double J hook+Ratchet



CODE	Width(mm)	LC(daN)	System BS	STF(daN)	
TL3503	35	1500	3000	230	2-parts Double J hook+Ratchet



CODE	Width(mm)	LC(daN)	System BS	STF(daN)	
TL3502	35	1000	2000	200	2-parts Double J hook+Ratchet



CODE	Width(mm)	LC(daN)	System BS	STF(daN)	
TL2815	28	750	1500	100	2-parts Double J hook+Ratchet



## Lashing Systems with Ratchet Buckle EN12195-2

CODE	Width(mm)	LC(daN)	System BS	STF(daN)	
TL2501	25	500	1000	125	2-parts Double J hook+Ratchet
TL2501	25	500	1000	125	2-parts S Hook With Safety Latch+Ratchet




CODE	Width(mm)	LC(daN)	System BS	STF(daN)	
TL2508	25	400	800	125	2-parts Double J hook+Ratchet
TL2508	25	400	800	125	2-parts S Hook +Ratchet







CODE	Width(mm)	LC(daN)	System BS	STF(daN)	
TL2505	25	250	500	125	2-parts Double J hook+Ratchet
TL2505	25	250	500	125	2-parts S Hook +Ratchet

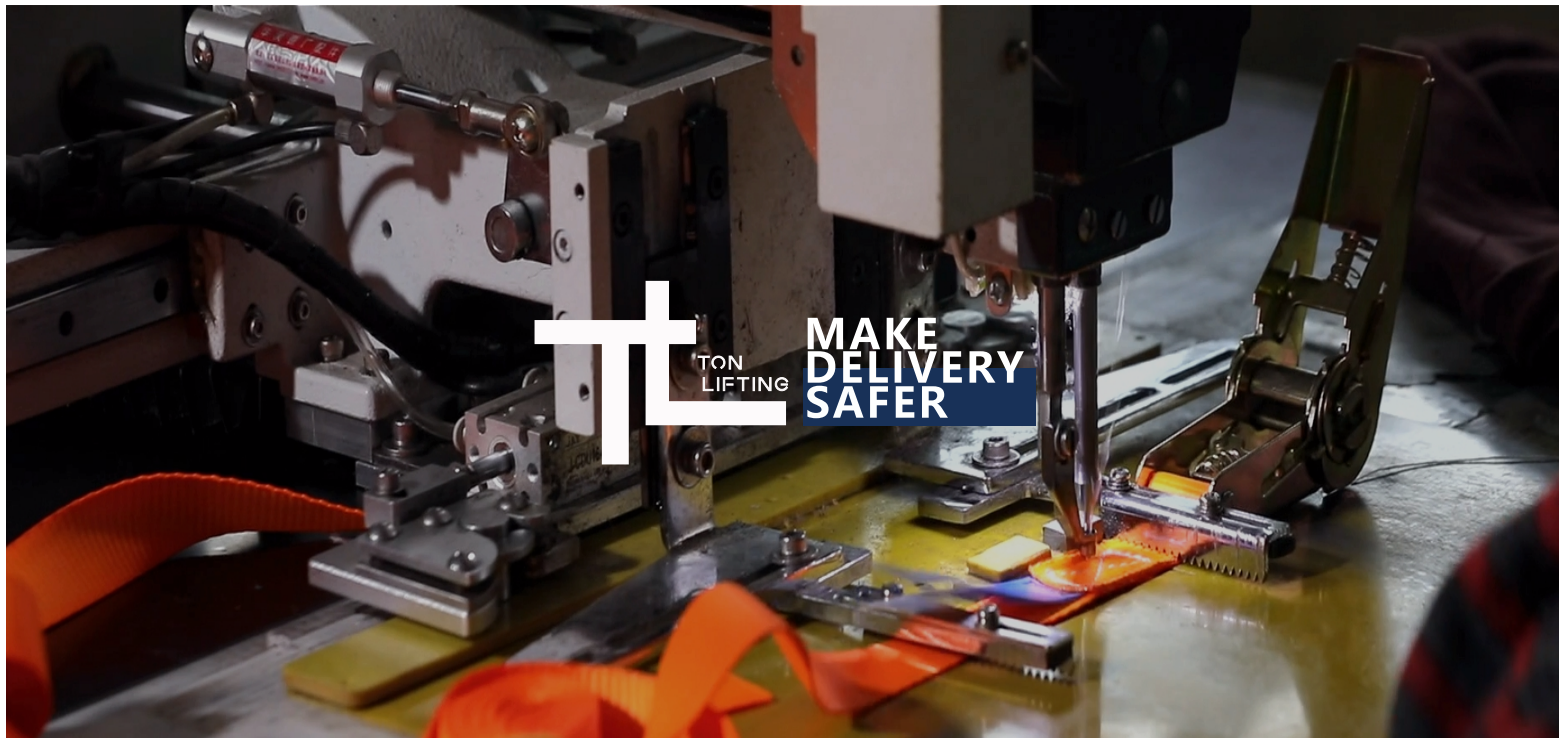





More Hook Option at Page 10-12







## Endless Lashing with Ratchet Buckle EN12195-2

CODE	Width(mm)	 LC(daN)	 LC(daN)	STF(daN)	
TLE5005E	50	2500	5000	500	



CODE	Width(mm)	 LC(daN)	 LC(daN)	STF(daN)	
TL5005E	50	2500	5000	300	





CODE	Width(mm)	 LC(daN)	 LC(daN)	STF(daN)	
TL5004E	50	2000	4000	300	



CODE	Width(mm)	 LC(daN)	 LC(daN)	STF(daN)	
TL5003E	50	1500	3000	300	



CODE	Width(mm)	 LC(daN)	 LC(daN)	STF(daN)	
TL3503E	35	1500	3000	230	



## Endless Lashing with Ratchet Buckle EN12195-2

CODE	Width(mm)	 LC(daN)	 LC(daN)	STF(daN)	
TL3502E	35	1000	2000	200	



CODE	Width(mm)	 LC(daN)	 LC(daN)	STF(daN)	
TL2815E	28	750	1500	200	




CODE	Width(mm)	 LC(daN)	 LC(daN)	STF(daN)	
TL2505E	25	250	500	125	



CODE	Width(mm)	 LC(daN)	 LC(daN)	STF(daN)	
C2525	25	125	250	-	




## Especial Straps



Reflect Light Woven Belt

### Ratchet Buckle:



Aluminum Body + Inox 304 Parts

CODE	Width(mm)	 LC(daN)	 LC(daN)	STF(daN)	
AR2505	25	250	500	125	






Waterproof


### Ratchet Buckle:




Aluminum Body + Inox 304 Parts

CODE	Width(mm)	 LC(daN)	 LC(daN)	STF(daN)	
AW2505	25	250	500	125	

## Lashing Systems for Vehicles on Car Transpoders

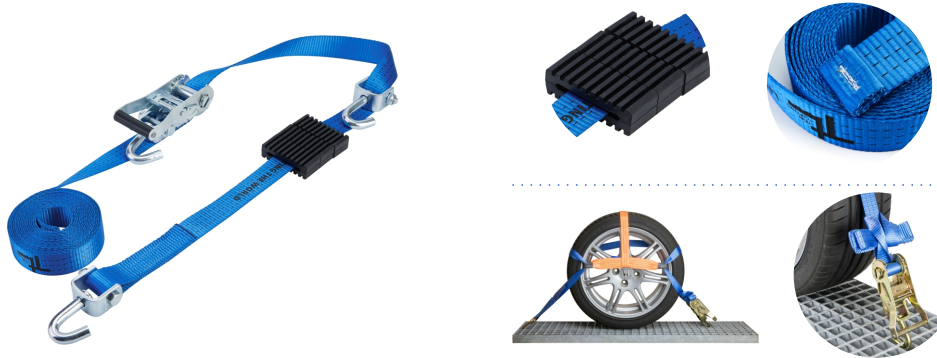

CODE	Width(mm)	LC(daN)	System BS(daN)	STF(daN)	
TL3503-T	35	1500	3000	230	2-parts Swivel J Hook+Ratchet

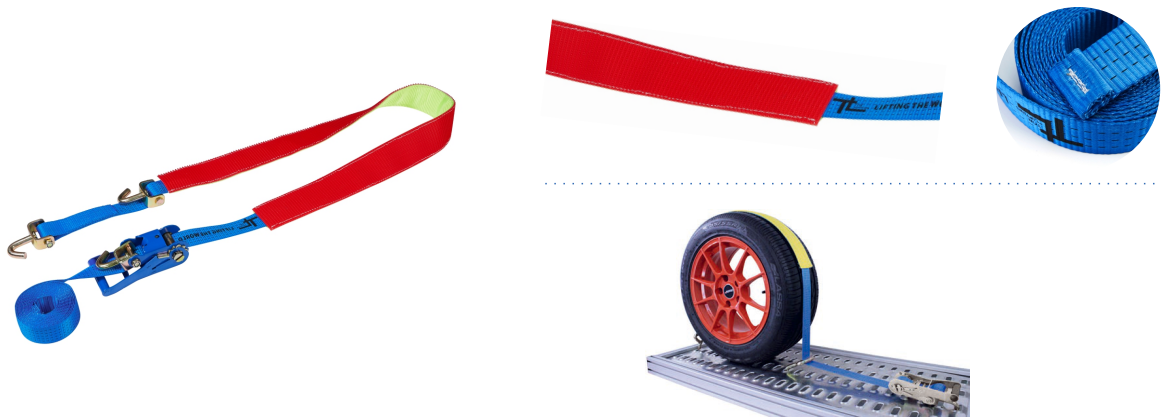


CODE	Width(mm)	LC(daN)	System BS	STF(daN)	
TL5005-T	50	2500	5000	300	2-parts Swivel J Hook+Ratchet



CODE	Width(mm)	LC(daN)	System BS	STF(daN)	
TL5002-E	50	1000	2000	230	2-parts E Hook+Ratchet



## Double Blister Packaging

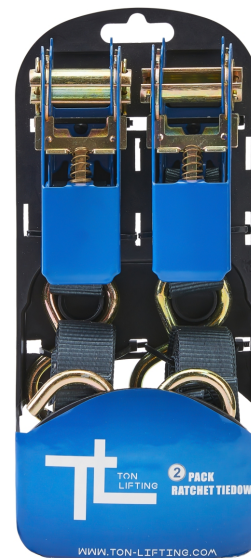

## Plastic Case 4 Pcs / 2 Pcs




## PVC Bag Packaging with Card



## Zipper Bag Packaging


A:Width(mm)    B:Length(mm)    C:Diameter(mm)

## Double J hook

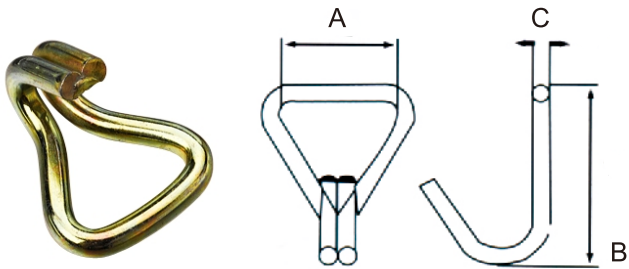


CODE	A(mm)	B(mm)	C(mm)	W(g)	LC(daN)
HK10010	100	130	16.5	850	5000
HK7510	75	130	16	705	5000
HK5005	50	83	11.3	235	2500
HK5004	50	83	10.5	200	2000
HK5003	50	82	9.25	155	1500
HK5002	50	82	8.2	95	1000
HK3503	35	65	9.25	120	1500
HK3502	35	65	8.2	120	1000
HK2815	28	58	7	60	750
HK2501	25	47	6.2	40	500
HK2508	25	47	6.2	40	400
HK2505	25	47	6.2	40	250

## Single J hook

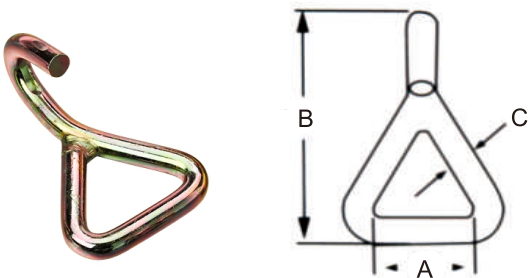


CODE	A(mm)	B(mm)	C(mm)	W(g)	LC(daN)
HK5005-SJ	50	130	15	417	2500
HK5003-SJ	50	100	11	182	1500
HK3503-SJ	35	90	11.9	185	1500
HK3502-SJ	35	90	9.9	132	1000

## Claw Hook




CODE	A(mm)	B(mm)	C(mm)	W(g)	LC(daN)
HK5005-U	50	65	11.3	185	2500
HK5004-U	50	65	10.5	155	2000
HK5003-U	50	60	8.9	112	1500
HK3503-U	35	55	8.9	95	1500
HK3502-U	35	55	8.2	83	1000

## Double J Hook with Safety Latch

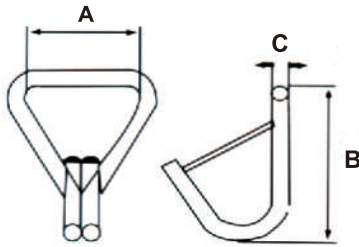


CODE	A(mm)	B(mm)	C(mm)	W(g)	LC(daN)
HK5005/SL	50	96	11.9	325	2500
HK5003/SL	50	87	9.3	200	1500
HK3503/SL	35	83	9.3	170	1500
HK2815/SL	28	86	7.8	112	750

## Swivel J Hook(out)




CODE	A(mm)	B(mm)	C(mm)	W(g)	LC(daN)
HK5005-R	50	105	15.2	440	2500
HK5003-R	50	105	13.1	400	1500
HK3503-R	35	105	13.2	310	1500

## Swivel J Hook(in)




CODE	A(mm)	B(mm)	C(mm)	W(g)	LC(daN)
HK5005-R	50	110	15.2	317	2500
HK5003-R	50	105	13.1	300	1500
HK3503-R	35	105	13.1	228	1500

## Hook with Keeper



CODE	A(mm)	B(mm)	C(mm)	W(g)	LC(daN)
HK5005-K	50	115	8.9	185	2500
HK3503-K	35	95	7	88	1500

## S Hook




CODE	A(mm)	B(mm)	W(g)	LC(daN)
HKS15	110	9.9	138	750
HKS12	110	9.25	125	600
HKS10	110	8.2	90	500
HKS08	106	7.6	82	400
HKS05	106	6.4	57	250




MAKE  
DELIVERY  
SAFER


CODE	Width(mm)	LC(daN)	W(g)
C501300	50	650	260
C501100	50	550	230




CODE	Width(mm)	LC(daN)	W(g)
C35800	35	400	150




CODE	Width(mm)	LC(daN)	W(g)
C35750	35	375	125




CODE	Width(mm)	LC(daN)	W(g)
C25600	25	300	128




CODE	Width(mm)	LC(daN)	W(g)
C25340	25	170	45



CODE	Width(mm)	LC(daN)	W(g)
C25250	25	125	31



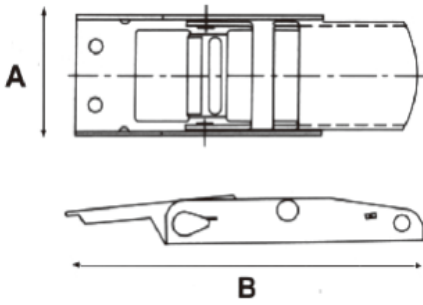

A:Width(mm)  
B:Length(mm)

HOOK OPTION



CODE	Width(mm)	LC(daN)	A(mm)	B(mm)
OB50600	50	300	55	155



CODE	Width(mm)	LC(daN)	A(mm)	B(mm)
OB50800	50	400	53	138



CODE	Width(mm)	LC(daN)	A(mm)	B(mm)
OB50136	50	680	53	150




CODE	Width(mm)	LC(daN)	A(mm)	B(mm)
OB50136-2	50	680	52	173






1000 kg

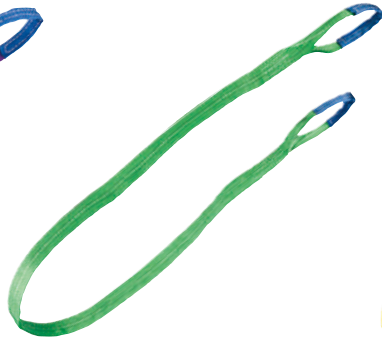

2000 kg

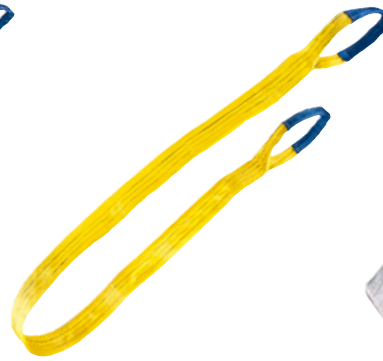


3000 kg







4000 kg

Standard:	EN 1492-1
Material:	Polyester, 2-layer
Safety Factor:	7:1
WLL:	all data in kg






## 30mm-1000kg

	WLL 			$\beta = 45^\circ$ 	$\beta = 60^\circ$ 
30mm	1000	2000	800	1400	1000






## 60mm-2000kg


	WLL 			$\beta = 45^\circ$ 	$\beta = 60^\circ$ 
60mm	2000	4000	1600	2800	2000

## 90mm-3000kg


	WLL 			$\beta = 45^\circ$ 	$\beta = 60^\circ$ 
90mm	3000	6000	2400	4200	3000

## 120mm-4000kg


	WLL 			$\beta = 45^\circ$ 	$\beta = 60^\circ$ 
120mm	4000	8000	3200	5600	4000

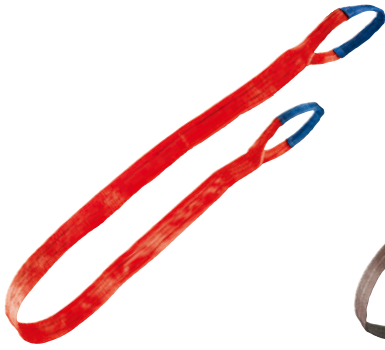


5000 kg

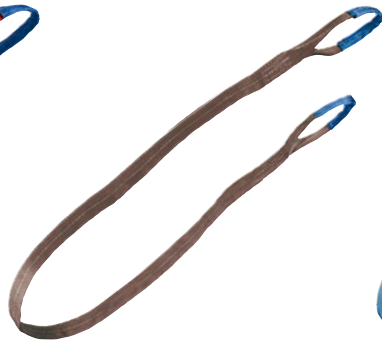

6000 kg

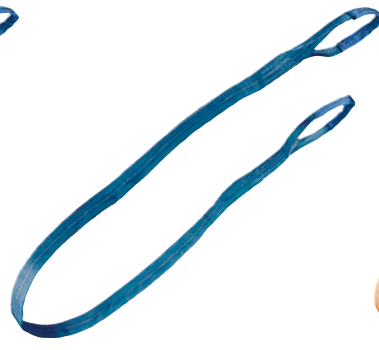



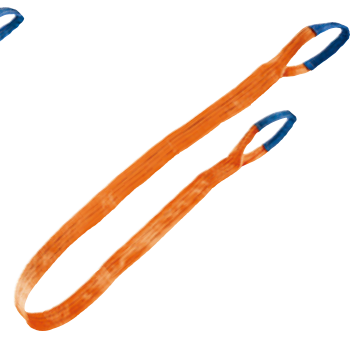


8000 kg








10000 kg

Standard:	EN 1492-1
Material:	Polyester, 2-layer
Safety Factor:	7:1
WLL:	all data in kg





## 150mm-5000kg

	WLL				$\beta = 45^\circ$ 	$\beta = 60^\circ$ 
150mm	5000	10000	4000	7000	5000	






## 180mm-6000kg


	WLL				$\beta = 45^\circ$ 	$\beta = 60^\circ$ 
180mm	6000	12000	4800	8400	6000	

## 240mm-8000kg


	WLL				$\beta = 45^\circ$ 	$\beta = 60^\circ$ 
240mm	8000	16000	6400	11200	8000	

## 300mm-10000kg

	WLL				$\beta = 45^\circ$ 	$\beta = 60^\circ$ 
300mm	10000	20000	8000	14000	10000	

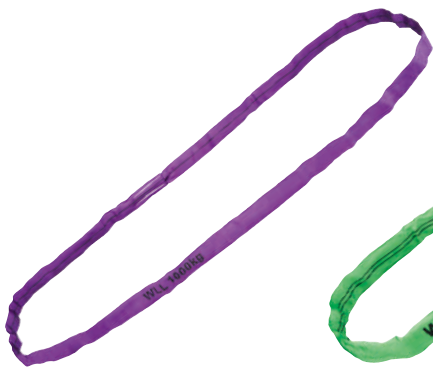

1000 kg

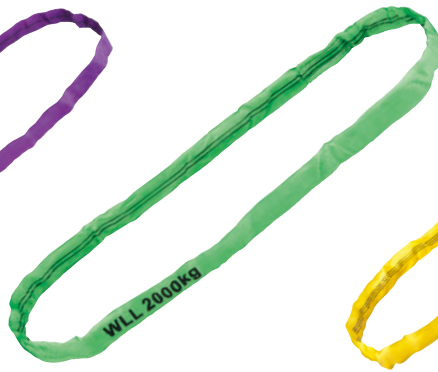

2000 kg







3000 kg








4000 kg

Standard:	EN 1492-1
Material:	Polyester
Safety Factor:	7:1
WLL:	all data in kg






## 1000kg

WLL					
1000	2000	800	1400	1000	






## 2000kg

WLL					
2000	4000	1600	2800	2000	

## 3000kg


WLL					
3000	6000	2400	4200	3000	

## 4000kg


WLL					
4000	8000	3200	5600	4000	



5000 kg

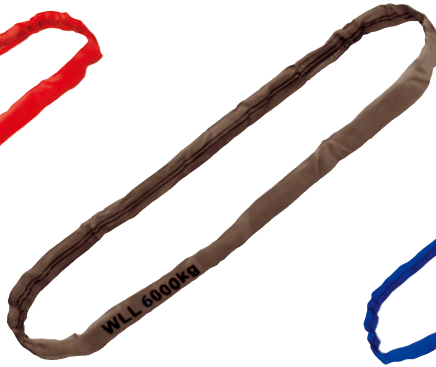

6000 kg

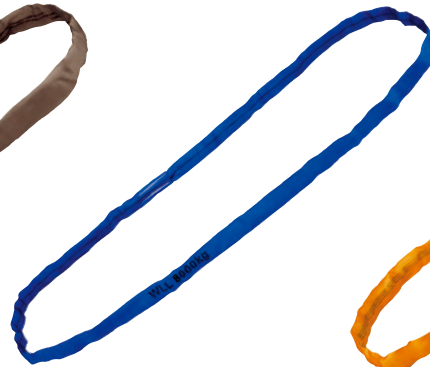






8000 kg








10000 kg

Standard:	EN 1492-1
Material:	Polyester
Safety Factor:	7:1
WLL:	all data in kg






## 5000kg

WLL					
5000	10000	4000	7000	5000	


## 6000kg

WLL					
6000	12000	4800	8400	6000	



## 8000kg

WLL					
8000	16000	6400	11200	8000	

## 10000kg

WLL					
10000	20000	8000	14000	10000	

## Cargo Net

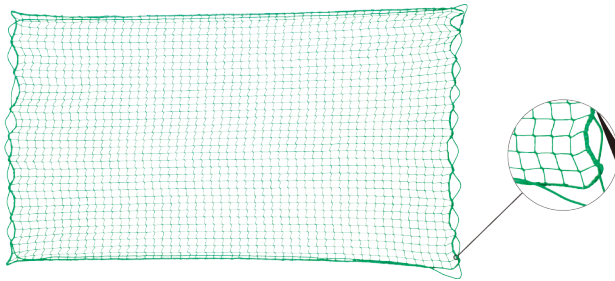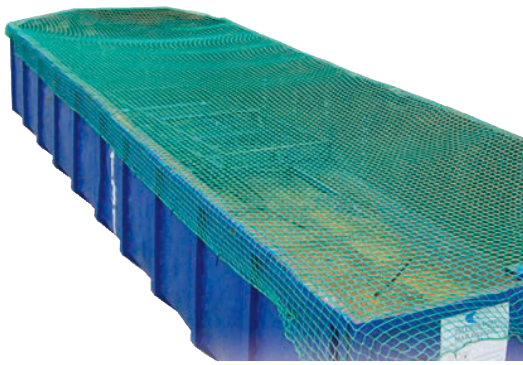

	Size
<b>PP-Net</b> <b>Mesh::45 mm x 45 mm</b> <b>Diameter:6 mm</b>	1,5 m x 2,2 m
	1,5 m x 2,5 m
	2,0 m x 2,5 m
	2,0 m x 3,0 m
	2,0 m x 3,5 m
	2,5 m x 3,0 m
	2,5 m x 3,5 m
	2,5 m x 4,0 m
	2,5 m x 4,5 m
	3,0 m x 3,5 m
	3,0 m x 4,0 m
	3,0 m x 5,0 m
	3,0 m x 6,0 m
	3,5 m x 5,0 m
	3,5 m x 6,0 m
	3,5 m x 7,0 m
3,5 m x 8,0 m	

## Bungee Straps

Diameter(mm)	length(cm)
8	100
8	80
8	60
8	40



## Plastic Chain








Diameter(mm)	length(cm)	Color
6X35	2500	RED&WHITE
6X35	2500	BLACK&YELLOW

## Disposable Sling



Standard:	DIN 60005
Material:	Polyester
Safety Factor:	5:1
WLL:	all data in kg

WLL					
750	1500	600	1050	750	
1000	2000	800	1400	1000	
1500	3000	1200	2100	1500	

## Anchor Combi Lashing Track



### Technical data:

material: steel, galvanized / aluminum / stainless steel

length: 3,048 mm +/- 5

hole diameter: 25 mm

material thickness: 2.5 mm / 3.0 mm

## Edge Protection



### EP001

Strap Protectors for Flatbed Equipment, Unparalleled Cargo

Management Solutions for Truckers, Contractors, and Outdoor Enthusiasts

## Airline Lashing Track



AT001

### Technical data:

Track width: 50 mm

Hole diameter: 20 mm

Hole pattern: 25 mm

Length: 6,000 mm +5/-0 / 3,000 mm +1/-5 / 2,000 mm +1/-5

Material: aluminum, untreated

## Single Airline Fitting



CODE

LC(daN)

COLOUR OF PLASTIC

AF500

500

ORANGE



CODE

LC(daN)

COLOUR OF PLASTIC

AF500

500

STEEL, ALUMINUM

NINGBO INHIGH NEW MATERIAL TECHNOLOGY CO.,LTD.



Sales manager

**Kyle Zhou**

Sales manager

+86 189 6824 9988

kyle@ton-lifting.com

Administration

**Mark Chen**

Administration

+86 189 5829 3993

mark@ton-lifting.com

Merchandiser

**Jade Lian**

Merchandiser

+86 159 5742 0135

jade@ton-lifting.com



MAKE  
DELIVERY  
SAFER



WWW.TON-LIFTING.COM